



* All images in this datasheet are for illustrative purposes only.

TR3DK-BM Series

A New Level of Classroom: LG CreateBoard™ Gen 2

Google EDLA

Built-In Collaboration Software

Easy Connection & Sharing

Genuine Touch & Writing Experience

Security & Compatibility

Remote-control Services


CreateBoard Series (TR3DK-BM)

Display	Inch	98" / 86" / 75" / 65" / 55"
	Native Resolution	3,840 × 2,160 (UHD)
	Brightness (Typ.)	390 nits (98" w/o glass) 350 nits (86"-55" w/ glass)
Touch	Multi-Touch Point	20 Points (98"), 40 points (86"-55")
Connectivity	Input	HDMI (x3, HDCP2.2), RGB (VGA), Audio (3.5mm), RS-232C, RJ45(LAN), USB 3.0 Type A(x4), USB2.0 Type A, USB Type-C (USB-PD, DP-Alt)
	Output	HDMI, Audio Out (Optical 1(SPdif)), Touch USB (x2), RJ45 (LAN)

READY TO CREATE

Google EDLA Certified

LG CreateBoard is Google EDLA Certified and powered with Android 13. You have official access to Google Play Store out of the box. A local installation for your apps means you do not need to plug in a laptop, or use your browser to get started working. Use Google for Education tools like Docs, Sheets and Slides with a simple sign-on. Remain secure with Google Play Protect Service – always on the lookout for suspicious behavior. Android 13 let's you customize your apps by color, theme and language.

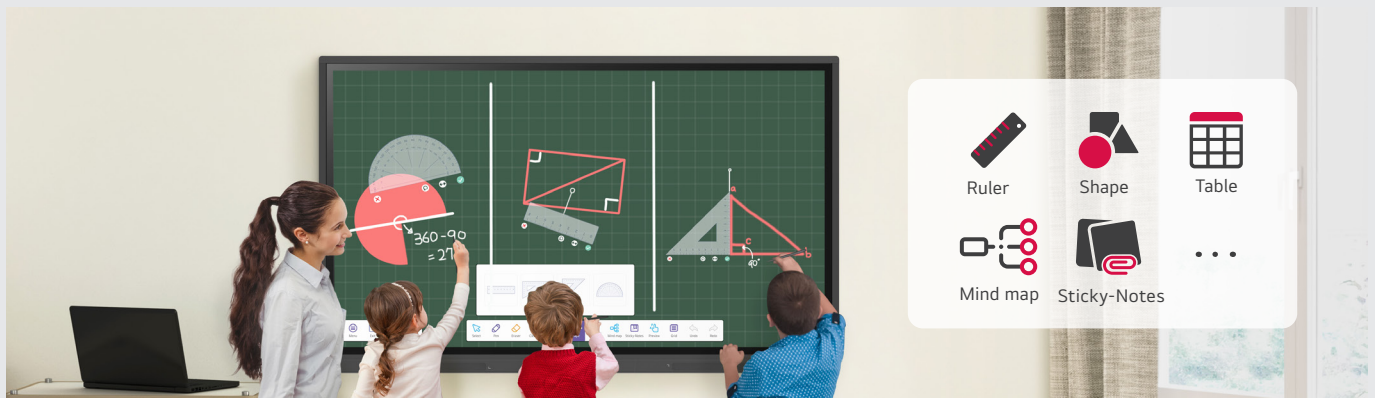

CreateBoard Lab Whiteboarding Software

LG CreateBoard Lab offers a variety of educational templates and teaching tools such as a ruler, table, and sticky notes, allowing for active engagement by students and enabling intuitive classes. Editing images and videos becomes easy with LG CreateBoard, and created resources can be easily shared with others through connected cloud drives.



Precise Touch

LG CreateBoard can simultaneously detect up to 40 points for multi-touch functionality. This creates a lifelike touch experience, helping students easily become accustomed and truly engage in classes. CreateBoard was designed to facilitate the organic engagement of students.

* A max of 40 points are detected in the Windows environment, a max of 32 points are recognized in the Android environment, and up to 10 points can be recognized in the writing app.




Smart Viewing

The Smart Viewing feature of LG CreateBoard enables efficient teaching. Two or more materials can be displayed on the same screen simultaneously without having to repeat Alt-tab, making teaching more convenient and efficient. Two materials can be displayed side by side (multi window mode), or one material can be overlaid on the other one (picture-in-picture mode).*

* Multi window mode may not work for some apps, and picture-in-picture mode is available for the external source screen.


READY TO SHARE

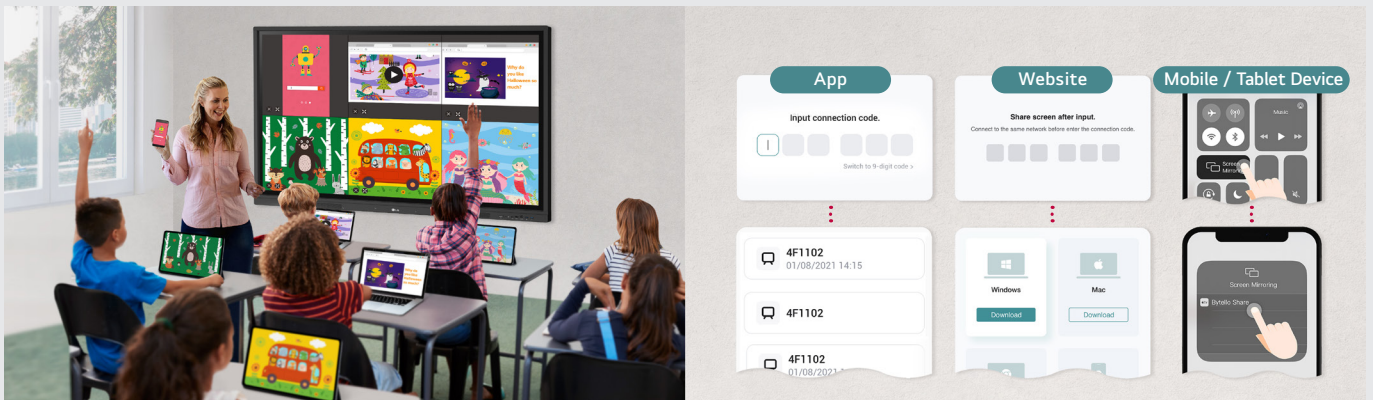

CreateBoard Share Wireless Casting Solution

LG CreateBoard Share enables users to show up to 9 shared screens or a file on a screen in real-time when the LG CreateBoard Share app is installed on the device. *Also, files from the host can be easily sent to any devices connected to the LG CreateBoard Share app, and several quick controls by the host are available.


* LG CreateBoard also supports app-less sharing for PC (via website) and mobile devices within the same network. For a more stable connection, we recommend the installation of a dedicated app (LG CreateBoard Share).

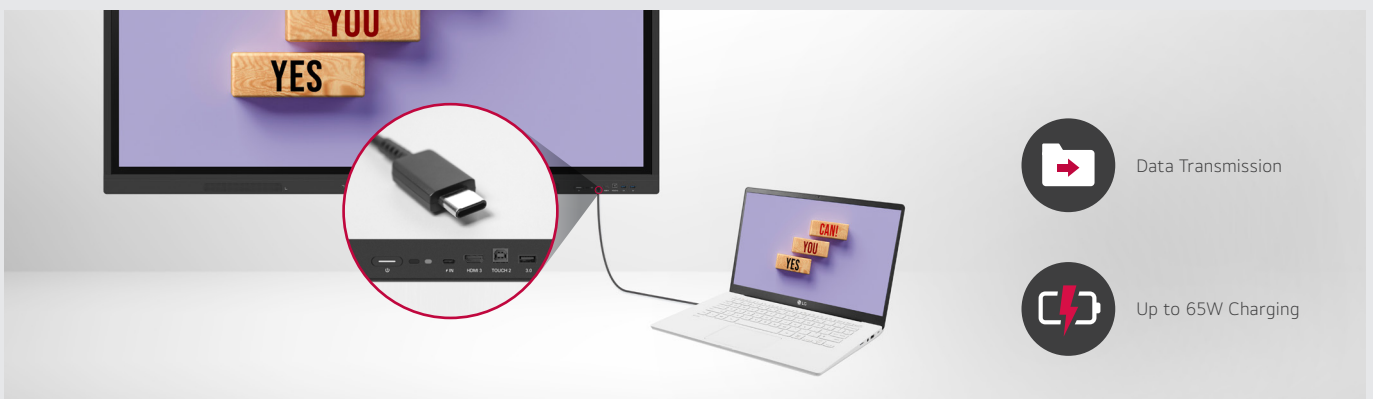

Easy Connection with USB Type-C

USB-C connectivity simplifies connections which enables charging, video, audio, touch and data transmission with just one cable.*

* USB Type-C cables are sold separately.

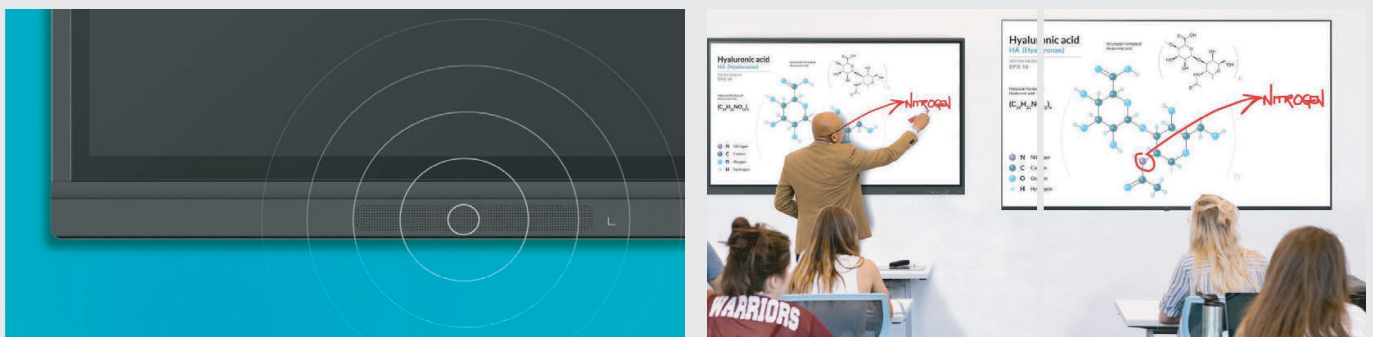

Amazing Sound

Powerful speakers help capture students' attention across the classroom. By ensuring that the audio is clear and easy to hear, teachers can ensure that content is more accessible to every student they can participate fully in classroom discussions and activities.

HDMI-out


Displaying content on a larger screen: An interactive display in a classroom is a great tool for sharing content with students. However, sometimes the display itself might not be large enough for everyone in the class to see clearly. In this case, an HDMI-out port allows the teacher to connect the display to a larger screen, such as a projector or a TV. This ensures that everyone in the class can see the content clearly and comfortably.

READY TO MANAGE



LG ConnectedCare DMS with CAP (Common Alerting Protocol)

LG ConnectedCare DMS is a cloud solution for remotely monitoring, controlling, and managing the status of LG CreateBoard installed in educational environments. This feature enables IT managers to operate and manage important resources on operating devices without physically visiting sites. ConnectedCare DMS now supports Common Alerting Protocol based security systems.

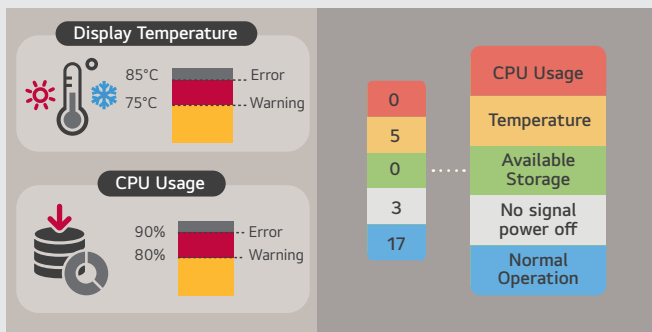


Threshold Settings

Users can set thresholds in eight categories including display temperature, memory usage, or signal, and can receive warning or error notifications based on their threshold settings.

Monitoring & Fault Diagnosis

An engineer can check the status in real-time and diagnose problems remotely. Also, the current status of issues can be categorized, allowing for easy viewing and quick responses.

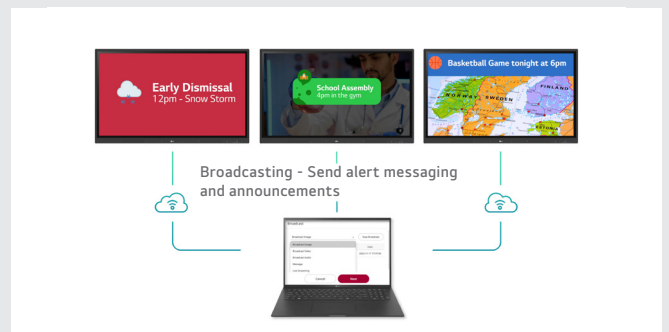

Alert Message & Broadcasting

LG ConnectedCare allows the organization to send alerts, messages, videos, or live streams to the display. When the alert message is sent out to the device, LG CreateBoard interrupts the current display shows the alert information.



App Management


Access the ConnectedCare DMS software remotely via the web-based dashboard at any time to monitor device health, troubleshoot issues, make system updates, and more.



Remote Scheduling & Control


Frequently used controls such as the power on/off, scheduling, brightness, and screen lock functions can be applied remotely. Content including images, videos, audio messages, or live streaming can be remotely shared with connected devices.

OTHER FEATURES

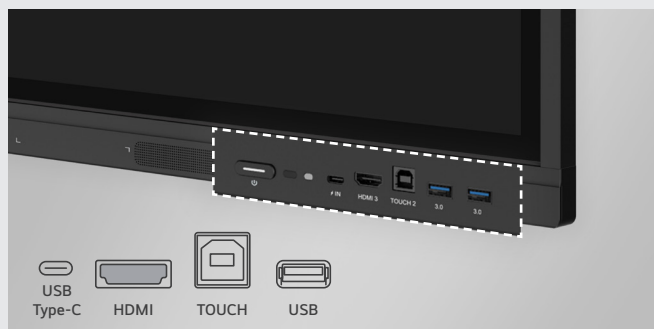

Front Connectivity Design

Front connections allow easy access to connect and disconnect cables and other devices without having to reach around to the back of the display. This saves time and effort, making it easier to set up and adjust the display, even with USB-C connected BYOD (Bring Your Own Device).

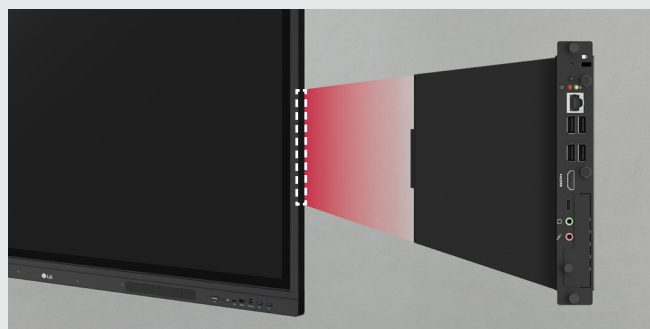

Built-in OPS Slot


The built-in OPS slot supports pluggable devices that allow a range of collaboration tools that can help students and teachers work together more effectively.

* OPS (Open Pluggable Specification) is an optional purchase



Windows PC OPS Accessory

Designed for seamless integration with an LG CreateBoard, this OPS Slot-In PC is a smart, fast, user-friendly, secure operating system for classrooms.

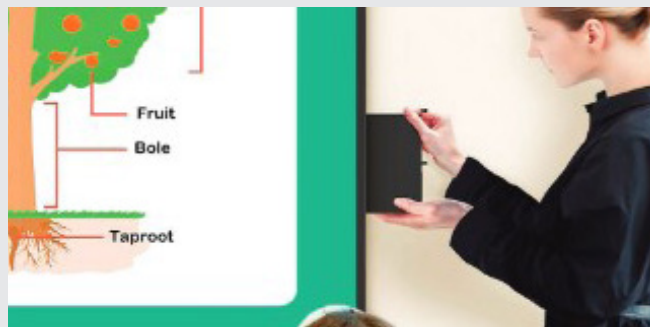

ChromeOS OPS Accessory


This Google-certified Chrome OPS slot-in device is designed for seamless integration with an LG CreateBoard and simplifies deployment throughout schools, granting teachers and students easy access to their content.

MOUNTING OPTIONS



ST-860F Slim Cart

With a sleek design, the ST-860F Slim Cart allows stable mobility for your CreateBoard while minimizing the overall physical footprint.



Universal Wall Mount

LG offers a fixed wall mount accessory that allows the display to be securely installed in a variety of environments.



Standard Cart

LG offers a sturdy mobile cart with shelves, allowing you to more easily transport the display and some peripherals between various rooms.


SPECIFICATIONS

		98TR3DK-BM	86TR3DK-BM	75TR3DK-BM	65TR3DK-BM	55TR3DK-BM
DISPLAY	Screen Size	98"	86"	75"	65"	55"
	Panel Technology	IPS	IPS	IPS	IPS	IPS
	Resolution	16:9 3840x2160 (4K UHD)	16:9 3840x2160 (4K UHD)	16:9 3840x2160 (4K UHD)	16:9 3840x2160 (4K UHD)	16:9 3840x2160 (4K UHD)
	Refresh Rate	60Hz	60Hz	60Hz	60Hz	60Hz
	Brightness (Typ. / Max)	390 nits / 490 nits	350 nits / 400 nits	350 nits / 400 nits	350 nits / 400 nits	350 nits / 400 nits
	Contrast Ratio	1200:1 (static), 5000:1 (Dynamic)	1200:1 (static), 5000:1 (Dynamic)	1200:1 (static), 5000:1 (Dynamic)	1200:1 (static), 5000:1 (Dynamic)	1200:1 (static), 5000:1 (Dynamic)
	Viewing Angle (H x V)	178° x 178°	178° x 178°	178° x 178°	178° x 178°	178° x 178°
	Response Time	8ms	8ms	8ms	8ms	8ms
	Operation Hours (Hours/Day)	16/7	16/7	16/7	16/7	16/7
	Touch Points	20 Point Max Multi-touch	40 Point Max Multi-touch (40 Point Max for Windows, 32 Point Max for Android)	40 Point Max Multi-touch (40 Point Max for Windows, 32 Point Max for Android)	40 Point Max Multi-touch (40 Point Max for Windows, 32 Point Max for Android)	40 Point Max Multi-touch (40 Point Max for Windows, 32 Point Max for Android)
Touch Technology	Infrared	Infrared	Infrared	Infrared	Infrared	
HARDWARE	OS	Android 13	Android 13	Android 13	Android 13	Android 13
	CPU	Quad core A55	Quad core A55	Quad core A55	Quad core A55	Quad core A55
	GPU	Mali G52MP2	Mali G52MP2	Mali G52MP2	Mali G52MP2	Mali G52MP2
	Storage	64GB	64GB	64GB	64GB	64GB
	RAM	8GB	8GB	8GB	8GB	8GB
	OPS (Open Pluggable Specification)	Yes, Optional	Yes, Optional	Yes, Optional	Yes, Optional	Yes, Optional
	Speakers	Stereo 15W x 2 Forward-Facing	Stereo 15W x 2 Forward-Facing	Stereo 15W x 2 Forward-Facing	Stereo 15W x 2 Forward-Facing	Stereo 15W x 2 Forward-Facing
CONNECTIVITY	Input	HDMI (x3), VGA (x1), Audio-in (x1), RS232X (x1), RJ45 (x1), USB 3.0 (x4), USB 2.0 (x1), USB Type-C with PD (x1)	HDMI (x3), VGA (x1), Audio-in (x1), RS232X (x1), RJ45 (x1), USB 3.0 (x4), USB 2.0 (x1), USB Type-C with PD (x1)	HDMI (x3), VGA (x1), Audio-in (x1), RS232X (x1), RJ45 (x1), USB 3.0 (x4), USB 2.0 (x1), USB Type-C with PD (x1)	HDMI (x3), VGA (x1), Audio-in (x1), RS232X (x1), RJ45 (x1), USB 3.0 (x4), USB 2.0 (x1), USB Type-C with PD (x1)	HDMI (x3), VGA (x1), Audio-in (x1), RS232X (x1), RJ45 (x1), USB 3.0 (x4), USB 2.0 (x1), USB Type-C with PD (x1)
	Output	HDMI-out (x1), Audio-out (x1), SPDIF (x1), Touch USB (x2), RJ45 (x1)	HDMI-out (x1), Audio-out (x1), SPDIF (x1), Touch USB (x2), RJ45 (x1)	HDMI-out (x1), Audio-out (x1), SPDIF (x1), Touch USB (x2), RJ45 (x1)	HDMI-out (x1), Audio-out (x1), SPDIF (x1), Touch USB (x2), RJ45 (x1)	HDMI-out (x1), Audio-out (x1), SPDIF (x1), Touch USB (x2), RJ45 (x1)
	Wireless	802.11a/b/g/n/ac	802.11a/b/g/n/ac/ax (WiFi 6)	802.11a/b/g/n/ac/ax (WiFi 6)	802.11a/b/g/n/ac/ax (WiFi 6)	802.11a/b/g/n/ac/ax (WiFi 6)
	Bluetooth	4.0	5.0	5.0	5.0	5.0
	Ethernet	Gigabit LAN	Gigabit LAN	Gigabit LAN	Gigabit LAN	Gigabit LAN
BUILT-IN SOFTWARE	Collaboration	LG CreateBoard Lab, Note 2.0	LG CreateBoard Lab, Note 2.0	LG CreateBoard Lab, Note 2.0	LG CreateBoard Lab, Note 2.0	LG CreateBoard Lab, Note 2.0
	Casting	LG CreateBoard Share	LG CreateBoard Share	LG CreateBoard Share	LG CreateBoard Share	LG CreateBoard Share
	Management	LG ConnectedCare DMS	LG ConnectedCare DMS	LG ConnectedCare DMS	LG ConnectedCare DMS	LG ConnectedCare DMS
	Productivity	OfficeSuite	OfficeSuite	OfficeSuite	OfficeSuite	OfficeSuite
MECHANICAL	Weight (Net)	228.4 lbs. / 103.6 kg	129.2 lbs / 58.6 kg	104.3 lbs / 47.3kg	77.2 lbs / 35.0 kg	57.6 lbs / 26.1 kg
	Weight (Package)	278.9 lbs. / 126.5 kg	167.3 lbs / 75.9 kg	133.6 lbs / 60.6 kg	98.6 lbs / 44.7 kg	76.1 lbs / 34.5 kg
	Dimension (WxHxD) (Net)	88.4 x 52.1 x 3.5 in 2244.7 x 1323.2 x 89.5 mm	77.0 x 45.7 x 3.9 in 1957 x 1160 x 100 mm	67.3 x 40.2 x 3.5 in 1709 x 1020 x 88 mm	58.6 x 35.3 x 3.5 in 1489 x 897 x 88 mm	50.0 x 30.5 x 3.4 in 1271 x 774 x 87 mm
	Dimensions (WxHxD) (Package)	94.7 x 11.0 x 58.0 in 2406 x 280 x 1474 mm	83.1 x 50.5 x 8.9 in 2110 x 1283 x 225 mm	73.4 x 44.9 x 8.9 in 1863 x 1140 x 225 mm	64.1 x 39.6 x 8.2 in 1628 x 1005 x 208 mm	55.2 x 33.8 x 8.7 in 1401 x 859 x 220 mm
	VESA™ Mount Compatilbe	800 x 600	800 x 600	800 x 400	600 x 400	400 x 200
ENVIRONMENT	Operation Temperature	32°F to 104°F 0°C to 40°C	32°F to 104°F 0°C to 40°C	32°F to 104°F 0°C to 40°C	32°F to 104°F 0°C to 40°C	32°F to 104°F 0°C to 40°C
	Operation Humidity	10% to 90% RH	10% to 90% RH	10% to 90% RH	10% to 90% RH	10% to 90% RH
ELECTRICAL	Power Supply	100-240 Vac, 50/60Hz, 5.5A	100-240 Vac, 50/60Hz, 5.5A	100-240 Vac, 50/60Hz, 5.5A	100-240 Vac, 50/60Hz, 5.5A	100-240 Vac, 50/60Hz, 5.5A
	Typical Power Consumption	460 W	385 W	225 W	220 W	170 W
	Max Power Consumption	630 W	580 W	430 W	420 W	395 W
	Standby Power Consumption	≤0.5 W	≤0.5 W	≤0.5 W	≤0.5 W	≤0.5 W
REGULATORY & OTHER	FCC	Class "A"	Class "A"	Class "A"	Class "A"	Class "A"
	CE	Yes	Yes	Yes	Yes	Yes
	Energy Star	Yes	Yes	Yes	Yes	Yes
	Warranty	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited

CONNECTIVITY


TR3DK-BM Series (98")

Side



- 1 HDMI OUT
- 2 USB 3.0
- 3 TOUCH 1
- 4 HDMI 1
- 5 HDMI 2
- 6 HDMI 3
- 7 TOUCH 2
- 8 USB Type-C
- 9 SPDIF


Bottom



- 9 USB 2.0
- 10 VGA
- 11 AUDIO IN
- 12 LAN
- 13 RS232
- 14 AUDIO OUT
- 15 SWITCH
- 16 POWER

TR3DK-BM Series (86"-55")


Front



Bottom



Side

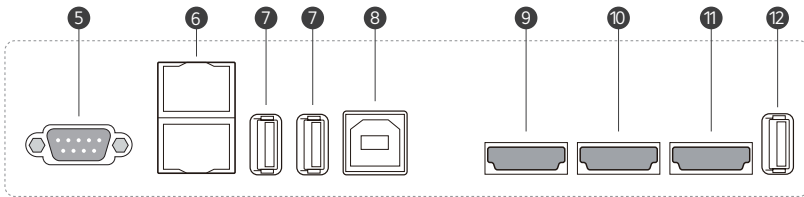


- 1 USB Type-C
- 2 HDMI 3
- 3 TOUCH 2
- 4 USB 3.0
- 5 RS-232C
- 6 LAN
- 7 USB 3.0
- 8 TOUCH 1
- 9 HDMI 1
- 10 HDMI 2
- 11 HDMI OUT
- 12 USB 2.0
- 13 SPDIF
- 14 AUDIO OUT
- 15 AUDIO IN
- 16 VGA
- 17 SWITCH
- 18 POWER



* Jack Panels may differ from the above image, so please contact LG sales team to verify before ordering.

DIMENSIONS


98"

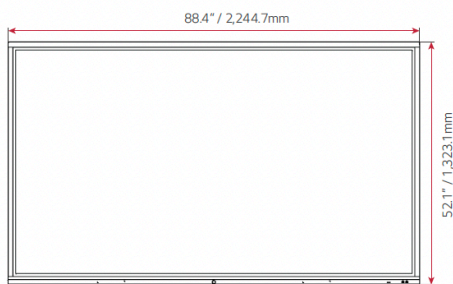



1.9\"/>

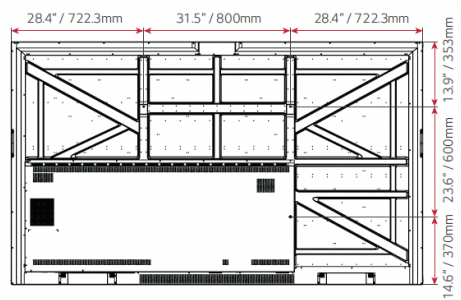




86"

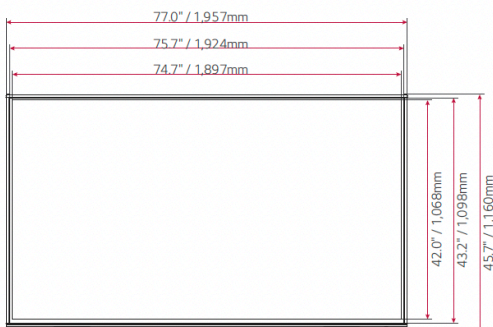

2.6\"/>

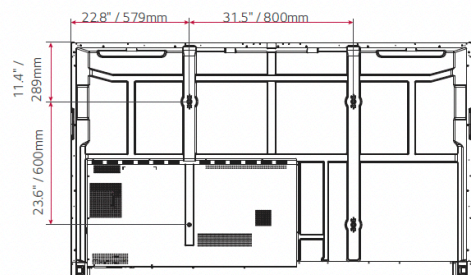

DIMENSION

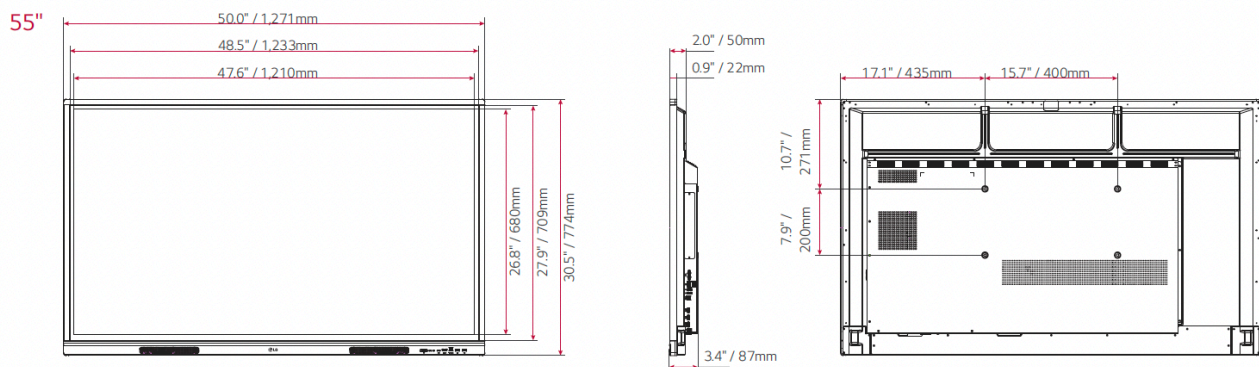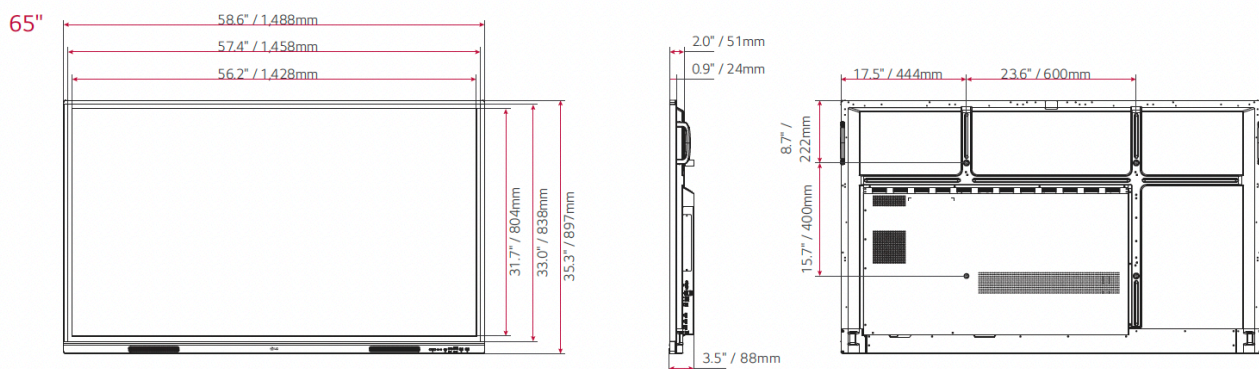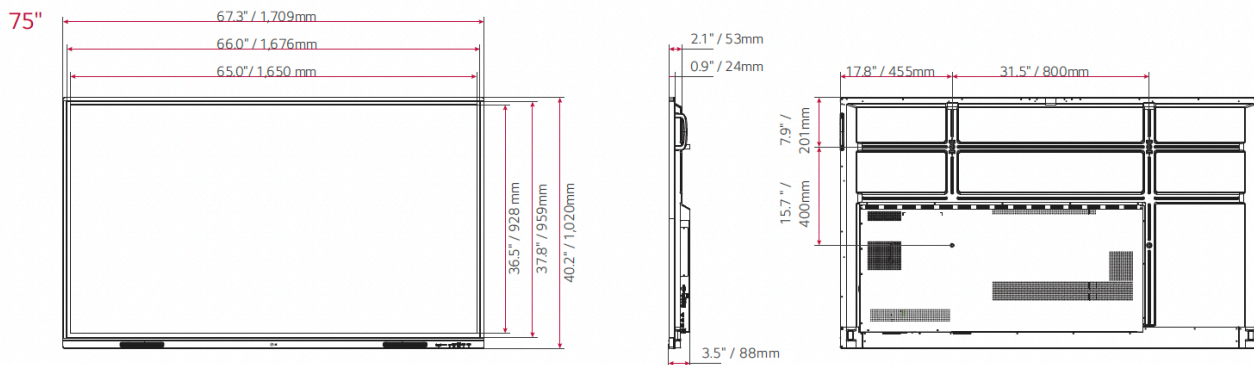

* Dimensions may differ from the above image, so please contact LG sales team to verify before ordering.